

# CORDLESS FAUX WOOD BLINDS

## Product Information Guide

### How to Measure

Inside Mount . . . . .	2
Outside Mount . . . . .	2

### Cordless Faux Wood Blinds

Product Detail . . . . .	3
Size Considerations . . . . .	3
Valance Options . . . . .	3

**NOTE: For orders of 50 blinds or more, please call customer service for estimated delivery time.**

# GRABER®

FOUNDATIONS

**NOVEMBER 2019**

## How to Measure Cordless Faux Wood Blinds


Measure each window individually as size variances are common. Record width first, then height (also referred to as length) to the nearest  $\frac{1}{8}$ ". Measure width from left to right, height from top to bottom, using a steel tape measure. Do not use a cloth tape.

### Inside Mount

Inside mount blinds are installed inside the window casing. **Window casing must be at least the listed depths for inside mount blinds.**

Type of Blind	Minimum Depth Mount (inches)	Depth Needed for Full Recess (inches)
Faux Wood—Headrail Only	1	2 $\frac{5}{8}$
Faux Wood—Headrail with Standard Valance	1	3 $\frac{1}{8}$
Faux Wood—Headrail with Decorative Valance	1	3 $\frac{3}{4}$


1. Measure the exact inside width of the window casing from one inside edge to the other in three different places. Record the narrowest measurement.
2. Measure the exact height in three different places from top edge of opening to top of sill. Record the longest measurement.
3. Measure the window diagonally in two places as shown. If the two diagonal dimensions are not equal, we recommend an outside mount application for optimal function and aesthetics.
4. Do not take deductions. Allowances are made at the factory to ensure a perfect fit.

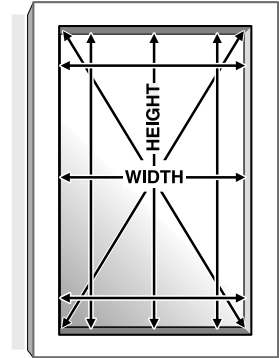

### Outside Mount


Outside mount blinds are installed outside the window casing, covering an area larger than the window itself.

1. Measure the exact width to be covered. If window opening allows, overlap by at least 1 $\frac{1}{2}$ " on each side (3" total overlap) to ensure light control and privacy.
2. Measure the exact height to be covered, including desired overlap (typically from top edge of molding to bottom edge, or to top of sill if there is one).
3. The factory makes NO allowances on outside mount.

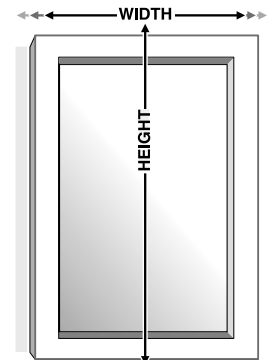

# Cordless Faux Wood Blinds

## Product Detail

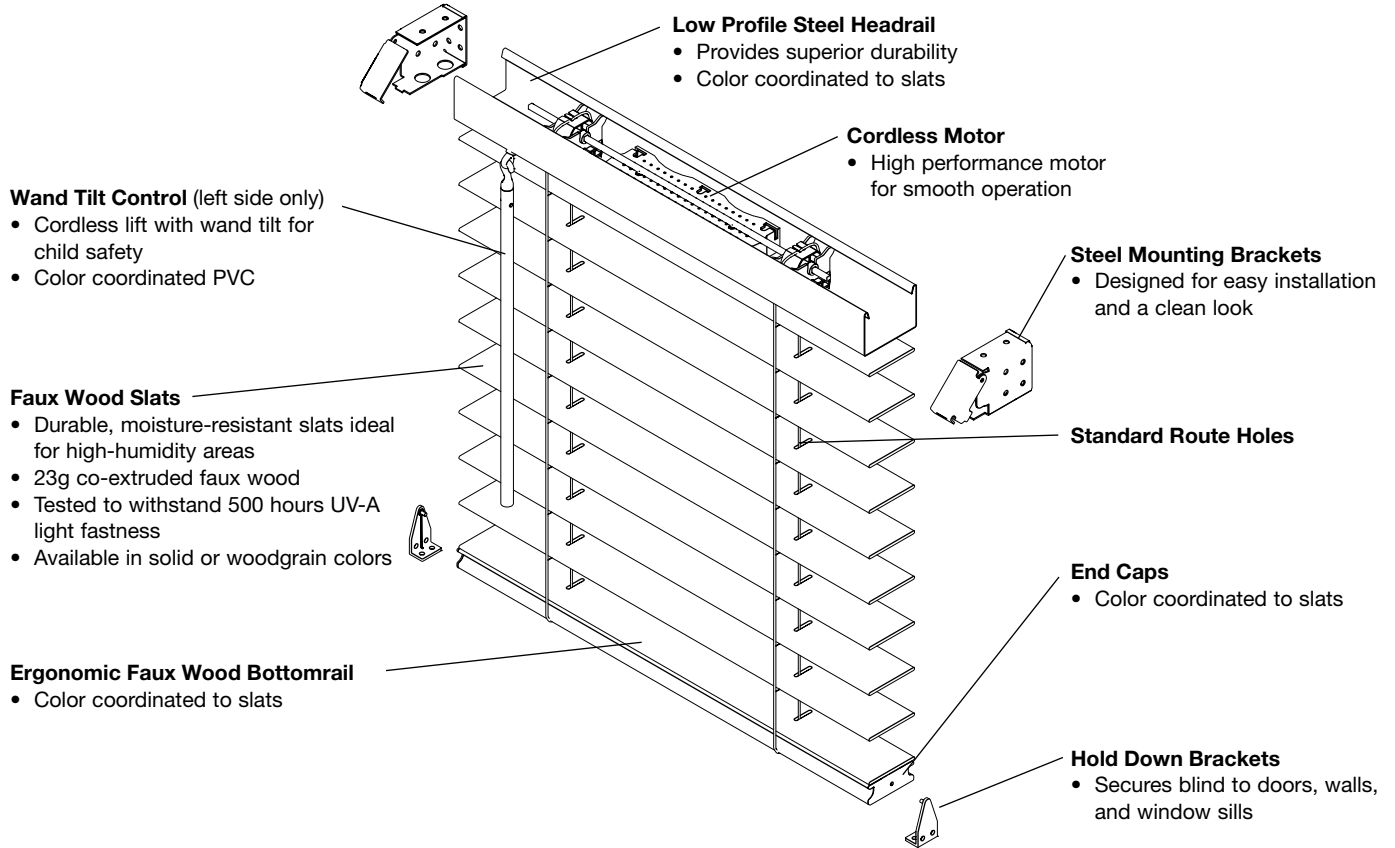

## Size Considerations

<b>Minimum Blind Width (inches)</b>	15½ inside mount* 15 outside mount
<b>Maximum Blind Width (inches)</b>	72½ inside mount* 72 outside mount
<b>Minimum Blind Height (inches)</b>	24
<b>Maximum Blind Height (inches)</b>	72

\*½" deduction is taken on all inside mount blinds.

**NOTE:** There is a 1" length tolerance. There may be extra slats that rest on the bottomrail.

<b>Finished Blind Width (inches)</b>	<b>Number of Ladders</b>	<b>Number of Lifts</b>
15 to 18	2	2
18½ to 24	2	2
24½ to 30	3	2
30½ to 36	3	2
36½ to 42	4	4
42½ to 48	4	4
48½ to 54	5	4
54½ to 60	5	4
60½ to 66	6	4
66½ to 72	6	4

**NOTE:** On all inside mount blinds, take deduction BEFORE determining ladder and lift quantity.

## Valance Options

- Available at no additional charge
- Special valance width available up to 108" without returns or 106½" with returns
- ½" to 3½" returns available on outside mount (2¾" default)
- ½" to 1¾" returns available on inside mount (½" default)

3" Standard Valance



¾" Decorative Valance



**NOTE: For orders of 50 blinds or more, please call customer service for estimated delivery time.**

# GRABER<sup>®</sup>

FOUNDATIONS

Graber is a brand of Springs Window Fashions, the Best Experience Company

Graber and the Graber logo are registered trademarks of Springs Window Fashions, LLC.

10002-110 (11/19)|S19-20130